

ACCESSORY CATALOG


Models

EH63 • 18hp

EH64 • 20.5hp

EH65 • 22hp

EH72 • 25hp

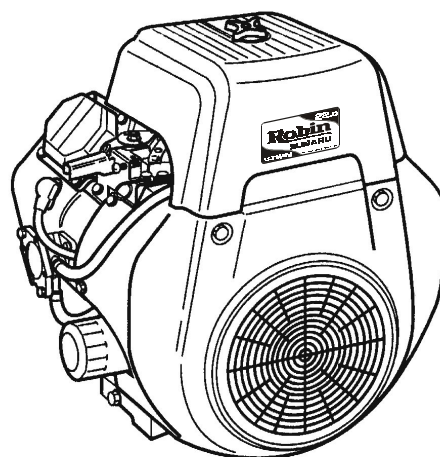

PUB-AC2001
Rev. 06/01

Robin America, Inc.

940 Lively Blvd. • Wood Dale, IL 60191 • Phone: 630-350-8200 • Fax: 630-350-8212
e-mail: sales@robinamerica.com • www.robinamerica.com

© Copyright 2001 Robin America, Inc.

CONTENTS

Horizontal Shaft

Standard Specifications	5
Standard Dimensions	
EH65	6
EH72	7
Specification Listings	
EH65	8
EH72	10
Factory Configurations	
Crankshafts	11
Main Bearing Covers	12
Hydraulic Pump Adapter	13
Heavy Duty Air Cleaner	14
Slow Down	15
Accessories	
Muffler Kits	17
Control Box Kit	19
Oil Drain Kit	20
Fuel Pump Relocation Kit	21
Charging System	22
Rotating Screen	23
Stub Shaft	24

Vertical Shaft

Standard Specifications	25
Standard Dimensions	26
Accessories	
Muffler Kit	27

- INTRODUCTION

This book describes additional engine options and kits. It contains dimensions and short descriptions for reference


• HORIZONTAL SHAFT ENGINE

STANDARD SPECIFICATIONS		EH63	EH64	EH65	EH72
Type		4-Stroke V-Twin Cylinder, Horizontal PTO shaft, Gasoline Engine			
Bore x Stroke	mm (in.)	2 - 80 x 65(3.15 x 2.56)			2-84x65(3.31 x 2.56)
Piston Displacement	cm ³ (cu in.)	653 (39.9)			720 (43.9)
Compression Ratio		8.3:1			8.3:1
Maximum Output	kW (HP)/rpm	13.4 (18.0)/3,600	15.3 (20.5)/3,600	16.4 (22.0)/3,600	18.4 (25)/3,600
Continuous Output	kW (HP)/rpm	10.8 (14.5)/3,600	11.9 (16.0)/3,600	12.7 (17.0)/3,600	13.3 (18.0)/3,600
Maximum Torque	Nm (kgmf)/rpm	43.3 (4.41)/2,000	44.3 (4.52)/2,200	45.6 (4.65)/2,500	53.6 (5.46)/2,500
Direction of Rotation		Counterclockwise as viewed from PTO shaft side			
Cooling System		Forced Air Cooling			
Valve Arrangement		Overhead Valve			
Lubrication		Full pressure type with Trochoid Pump			Incl. Oil Cooler
Lubricant		Automobile Oil SAE #20, #30 or 10W-30: Class SE or higher			
Capacity of Lubricant	L (qts.)	1.55 (1.6)			1.50 (1.8)
Carburetor		Down Draft, Float type			w/ Accelerating Pump
Fuel		Automobile Unleaded Gasoline			
Fuel feed System		Diaphragm Pump (Pulse type)			
Ignition System		Flywheel Magneto (Solid state)			
Spark Plug		NGK BP6ES (Champion N9YC)			
Charging Capacity		12V - 15A / 12V -30A			
Starting System		Electric Starter			
Governor System		Centrifugal Flywheel Type			
Air Cleaner		Dual Element Type			
Weight	kg (lb.)	44 (97.0)	44 (97.0)	44 (97.0)	46 (101.3)
Dimensions (L X W X H) mm (in.)		317 x 477 x 475(12.5 x 18.8 x 18.7)			

Specifications subject to change without notice.





• **HORIZONTAL SHAFT ENGINE**

STANDARD DIMENSIONS - EH63, EH64, EH65

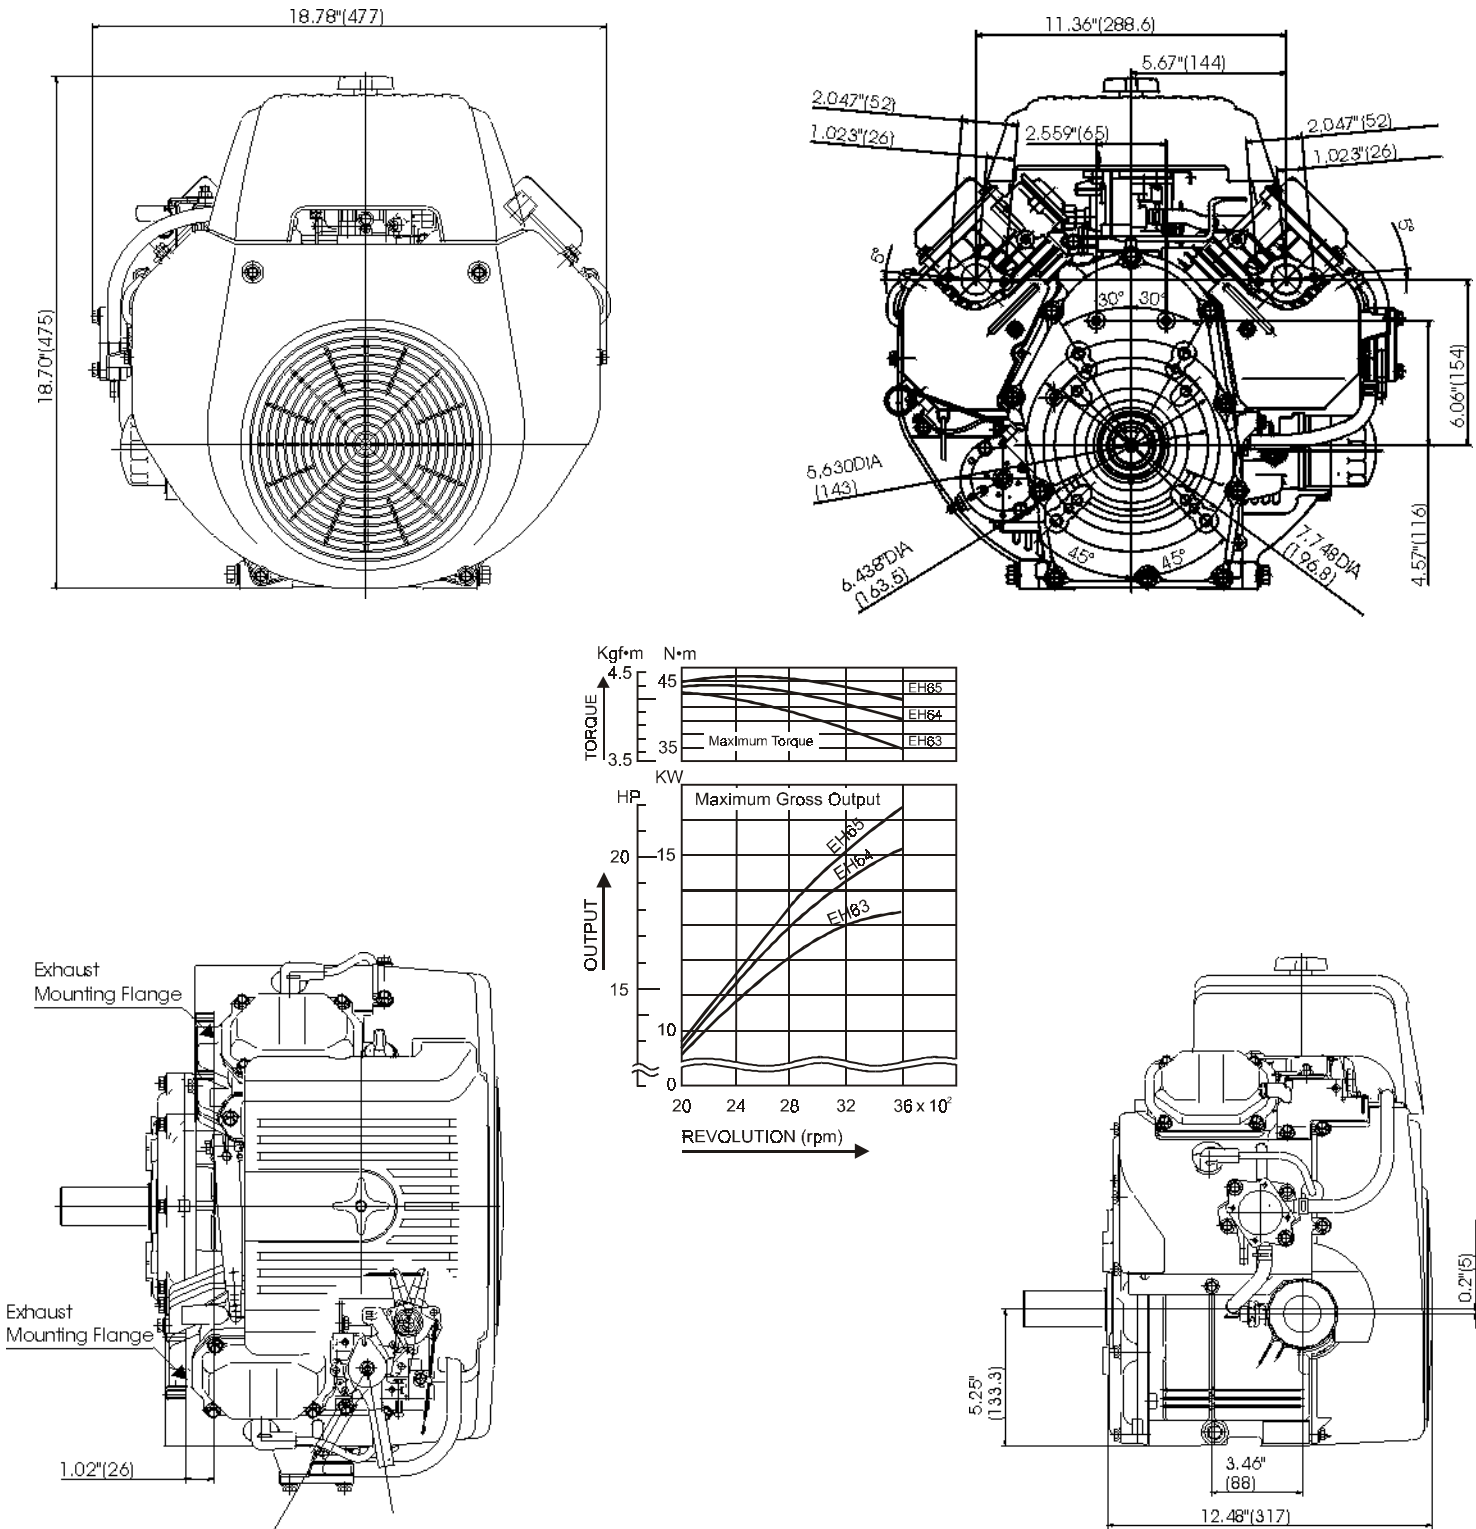

• HORIZONTAL SHAFT ENGINE

STANDARD DIMENSIONS - EH72

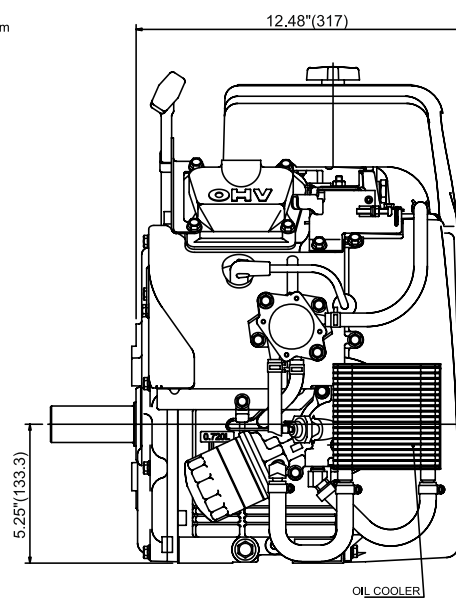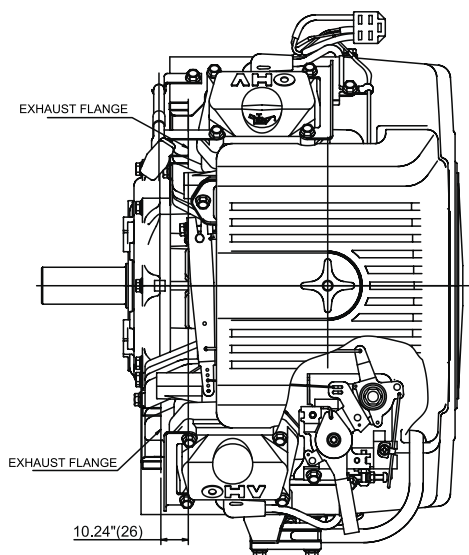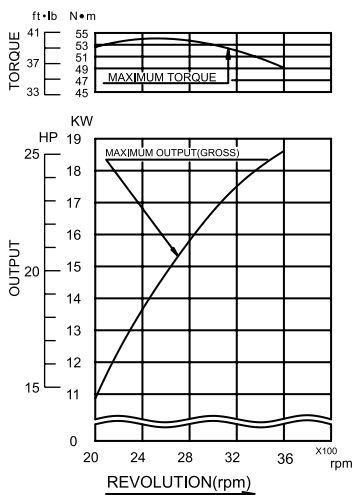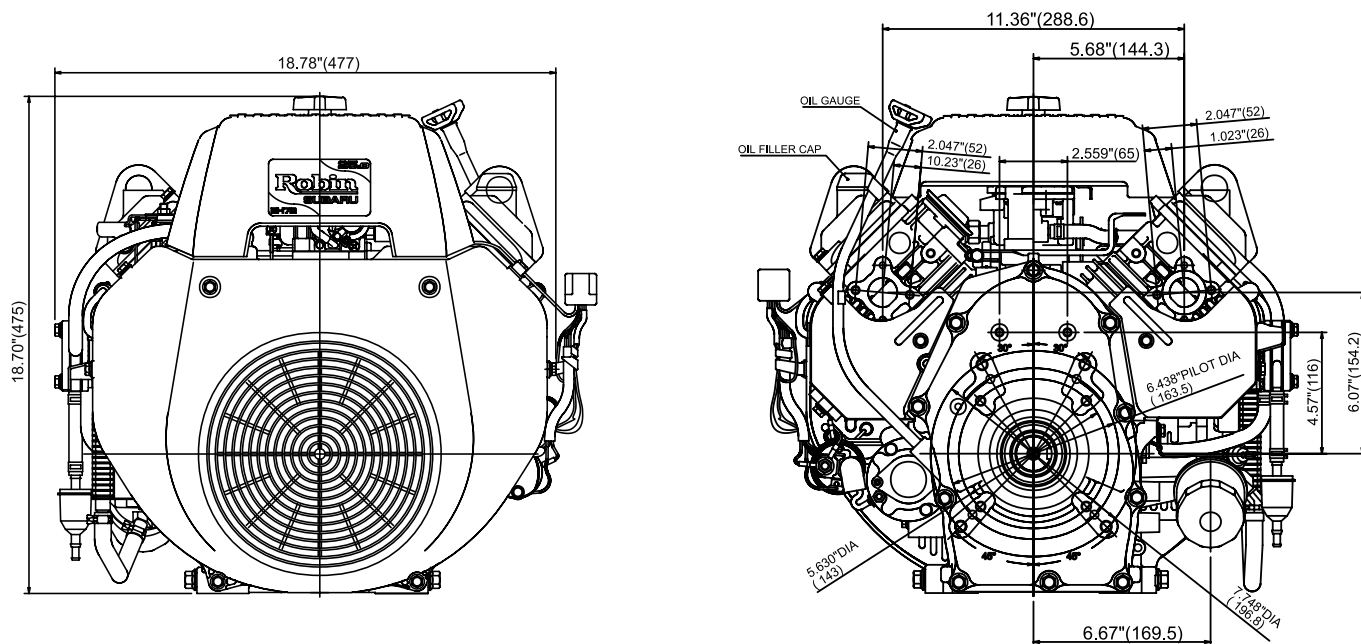

• HORIZONTAL SHAFT ENGINE

Specification Listings - EH65

OEM	EH650D	0101	0111	0201	0211	0301	0311	0321	0330
MODEL	EH63 (18HP) A	RAI	RAI	RAI	RAI	RAI	OEM	RAI	OEM
	EH64 (20.5HP) B	X	X	X		X			
	EH65 (22HP) C	X		X	X	X	X	X	X
CRANKSHAFT	DU (1"KEYWAY, 3/8-24UNF TAP)	X	X						
	DU-2 (1-7/16"KEYWAY, 5/8-18UNF TAP)			X	X				
	DU-3 (1-1/8"KEYWAY, 7/16-20UNF TAP)					X	X	X	X
	TAPER (2.25/12, 5/16-24UNF TAP)								
	PUMP (1" THREADED(1/14UNF)								
	D-STD (35MM KEYWAY, M10X1.25T2 TAP)								
	GEN-STD (30MM TAPER, M10X1.5T2 TAP)								
	LINCOLN TAPER								
	1-1/8"KEYWAY, 7/16-20UNF TAP PTO LENGTH 111MM								
STUB SHAFT	1"KEYWAY, MAX OUTPUT 7HP (KIT #92630003)								
* STD FLANGE	6.438"PILOT DIA, 5.63" & 7.75"B.C.								
* SAE-B FLANGE	5.755" PILOT DIA, 5.00"& 6.50"& 7.75"B.C.								
MAIN BEARING	BALL, STD FLANGE	X	X	X	X	X		X	X
COVER	SHELL, STD FLANGE								
	BALL, SAE-B FLANGE								
	SHELL, SAE-B FLANGE								
	BALL, STD FLANGE, EXTEND GAUGE TYPE						X		
	SHELL, SAE-B FLANGE, EXTEND GAUGE TYPE								
AIR CLEANER	STD (Dual Element)	X	X	X	X	X	X	X	X
MUFFLER	HEAVY DUTY (Donaldson)								
	HI-SIDE (KIT #92630001)								X
	HI-CENTER (KIT #92630005)								
	SIDE-O/F SIDE (KIT #92630004)						X		
	SPECIAL								
SPEED CONTROL	MANUAL with HANDLE	X	X	X	X	X	X	X	X
	REMOTE with HANDLE								
	V-STD TYPE (NON HANDLE)								
SPEED SET	HIGH IDLE	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm
	LOW GOVERNOR (MARK "S" IS SLOWDOWN SET)	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	S 2600rpm
	LOW IDLE (CARBURETOR)	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm
CHOKE CONTROL	MANUAL	X	X	X	X	X	X	X	X
	REMOTE								
	without KNOB								
ROTATING SCREEN	CHANGE WITH BLOWER HOUSING						X		X
CARBURETOR	STD (with MAIN FUEL CUT)	X	X	X	X	X	X	X	
	WITH SLOW DOWN SHAFT								X
	AUTO CHOKE (IT IS AVAILABLE TO SLOWDOWN)								
FUEL PUMP	STD	X	X	X	X	X	X	X	X
	POSITION IS FRONT								
OIL GAUGE	STD TYPE (STARTER SIDE)	X	X	X	X	X		X	X
	EXTEND TYPE (STARTER SIDE) CHANGE W/M.B.C& BAFFLE								
OIL FILLER	STD TYPE (STARTER SIDE)	X	X	X	X	X		X	X
	EXTEND TYPE (STARTER SIDE)						X		
OIL DRAIN	STD TYPE	X	X	X	X	X	X	X	X
	EXTEND TYPE (KIT #92630013)								
FLYWHEEL	US STD	X	X	X	X	X	X	X	X
	NON MAGNET TYPE								
SLOW DOWN	RGV TYPE (FRONT SET)CHANGE WITH CARBURETOR								
	MILLER TYPE (REAR SET)								
CHARGE SYSTEM	STD (12V-15A)	X		X		X	X	X	X
	12V-30ACHANGE WITH REGULATOR								
	SPECIAL								
SPARK PLUG	STD (BP6ES)	X	X	X	X	X	X	X	X
	BPR6ES								
CONTROL BOX	with HOUR METER (KIT #92630002)						X		X
	without HOUR METER				X				
WIRING HARNESS	STD	X	X	X	X	X	X	X	X
	EXTEND HARNESS 1000mm (NEED STD HARNESS)						X		X
	EXTEND HARNESS 1700mm (NEED STD HARNESS)								
	SPECIAL								
LABEL	RAI STD (TRADE, WARNING and EMISSION)	X	X	X	X	X	X	X	X
	CHOKE OPERATION LABEL								
	SPECIAL								

• HORIZONTAL SHAFT ENGINE

Specification Listings - EH65

OEM	EH650D	0521	1101	1111	2101	2311	2321	2331	7511	7511
MODEL	EH63 (18HP) A	OEM	RAI	OEM	RAI	OEM	OEM	OEM	OEM	OEM
	EH64 (20.5HP) B		X	X	X		X	X	X	X
	EH65 (22HP) C	X	X	X	X					
CRANKSHAFT	DU (1"KEYWAY, 3/8-24UNF TAP)	X								
	DU-2 (1-7/16"KEYWAY, 5/8-18UNF TAP)									
	DU-3 (1-1/8"KEYWAY, 7/16-20UNF TAP)								X	
	TAPER (2.25/12, 5/16-24UNF TAP)				X	X				
	PUMP (1" THREADED(1/14UNF)		X	X			X			
	D-STD (35MM KEYWAY, M10X1.25T2 TAP)									
	GEN-STD (30MM TAPER, M10X1.5T2 TAP)									
	LINCOLN TAPER								X	
	1-1/8"KEYWAY, 7/16-20UNF TAP PTO LENGTH 111MM									•
STUB SHAFT	1"KEYWAY, MAX OUTPUT 7HP (KIT #92630003)									
* STD FLANGE	6.438"PILOT DIA, 5.63" & 7.75"B.C.									
* SAE-B FLANGE	5.755" PILOT DIA, 5.00"& 6.50" & 7.75"B.C.									
MAIN BEARING	BALL, STD FLANGE	X	X						X	X
COVER	SHELL, STD FLANGE				X					
	BALL, SAE-B FLANGE			X						
	SHELL, SAE-B FLANGE					X				
	BALL, STD FLANGE, EXTEND GAUGE TYPE									
	SHELL, SAE-B FLANGE, EXTEND GAUGE TYPE						X	X		
AIR CLEANER	STD (Dual Element)	X	X	X	X	X	X	X	X	X
MUFFLER	HEAVY DUTY (Donaldson)									
	HI-SIDE (KIT #92630001)									
	HI-CENTER (KIT #92630005)									
	SIDE-O/F SIDE (KIT #92630004)			X		X			X	
	SPECIAL	X								
SPEED CONTROL	MANUAL with HANDLE		X	X	X	X			X	
	REMOTE with HANDLE	•				•	•	•		•
	V-STD TYPE (NON HANDLE)									
SPEED SET	HIGH IDLE	3400rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3725rpm	3300rpm	3300rpm
	LOW GOVERNOR (MARK "S" IS SLOWDOWN SET)	1600rpm	1600rpm	1600rpm	1600rpm	S 2000rpm	S 2300rpm	-	1600rpm	1600rpm
	LOW IDLE (CARBURETOR)	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1825rpm	1400rpm	1400rpm
CHOKE CONTROL	MANUAL	X	X	X	X	X			X	X
	REMOTE						X	X		
	without KNOB	X					X	X		X
ROTATING SCREEN	CHANGE WITH BLOWER HOUSING								X	X
CARBURETOR	STD (with MAIN FUEL CUT)	X	X	X	X	X	X	X	X	X
	WITH SLOW DOWN SHAFT									
FUEL PUMP	AUTO CHOKE (IT IS AVAILABLE TO SLOWDOWN)									
	STD		X	X	X	X			X	X
	POSITION IS FRONT						X	X		
OIL GAUGE	STD TYPE (STARTER SIDE)	X	X	X	X	X			X	X
	EXTEND TYPE (STARTER SIDE) CHANGE W/M.B.C & BAFFLE						•	•		
OIL FILLER	STD TYPE (STARTER SIDE)	X	X	X	X	X			X	X
	EXTEND TYPE (STARTER SIDE)						X	X		
OIL DRAIN	STD TYPE	X	X	X	X	X			X	X
	EXTEND TYPE (KIT #92630013)						X	X		
FLYWHEEL	US STD	X	X	X	X		X	X	X	X
	NON MAGNET TYPE					X				
SLOW DOWN	RGV TYPE (FRONT SET)CHANGE WITH CARBURETOR									
	MILLER TYPE (REAR SET)						X			
CHARGE SYSTEM	STD (12V-15A)	X	X	X	X		X	X	X	
	12V-30ACHANGE WITH REGULATOR									
SPARK PLUG	SPECIAL									X
	STD (BP6ES)	X	X	X	X				X	X
	BPR6ES					X	X	X		
CONTROL BOX	with HOUR METER (KIT #92630002)			X					X	
	without HOUR METER									
WIRING HARNESS	STD	X	X	X	X	X			X	
	EXTEND HARNESS 1000mm (NEED STD HARNESS)									
	EXTEND HARNESS 1700mm (NEED STD HARNESS)									
LABEL	SPECIAL						X	X		X
	RAI STD (TRADE, WARNING and EMISSION)	X	X	X	X	X			X	X
	CHOKE OPERATION LABEL					X				
	SPECIAL						X	X		

• HORIZONTAL SHAFT ENGINE


Specification Listings - EH72

	EH720DS	0010 15amp 7/16"	1- 30amp 1/8"	0020 1- 30amp 7/16"	0030 1- 30amp 7/16"	1210 30amp Spline9	1220 30amp Spline11	1230 30amp Spline13	2010 15amp SAE taper	EH720 - 0310T Concrete Saw	EH720 - 0395T Concrete Saw
OEM											
MODEL	EH72 (25HP)	X	X	X	X	X	X	X	X	X	X
CRANKSHAFT	DU-2 (1-7/16"KEYWAY, 5/8-18UNF TAP)	X		X						X	
	DU-3 (1-1/8"KEYWAY, 7/16-20UNF TAP)		X								X
	TAPER (2.25/12, 5/16-24UNF TAP)								X		
	SPLINE 9 tooth					X					
	SPLINE 11 tooth						X				
	SPLINE 13 tooth							X			
STUB SHAFT	1"KEYWAY, MAX OUTPUT 7HP (KIT #92630003)										
* STD FLANGE	6.438"PILOT DIA, 5.63" & 7.75"B.C.										
* SAE-B FLANGE	5.755" PILOT DIA, 5.00"& 6.50" & 7.75"B.C.										
MAIN BEARING	BALL, STD FLANGE	X	X	X					X	X	X
COVER	BALL, SAE-B FLANGE					X	X	X			
CYLINDER HEAD	STD	X	X	X	X	X	X	X	X	X	X
AIR CLEANER	STD FOR EH72 (Dual Element)	X	X	X	X	X	X	X	X		
MUFFLER	HEAVY DUTY (Donaldson)									X	X
	HI-SIDE (KIT #92630001)										
	HI-CENTER (KIT #92630005)										
	SIDE-OF SIDE (KIT #92630004)										
SPEED CONTROL	MANUAL with HANDLE	X	X	X	X	X	X	X	X	X	X
	REMOTE with HANDLE V-STD TYPE (NON HANDLE) (CHANGE SIMULTANEOUS WITH BRACKET(V-TYPE))										
SPEED SET	HIGH IDLE	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm	3800rpm
	LOW GOVERNOR (MARK "S" IS SLOWDOWN SET)	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm	1600rpm
	LOW IDLE (CARBURETOR)	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm	1400rpm
CHOKE CONTROL	MANUAL	X	X	X	X	X	X	X	X	X	X
	REMOTE										
	without KNOB										
ROTATING SCREEN	(CHANGE SIMULTANEOUS WITH BLOWER HOUSING)										
CARBURETOR	STD (with MAIN FUEL CUT)	X	X	X	X	X	X	X	X	X	X
	AUTO CHOKE (IT IS AVAILABLE TO SLOWDOWN)										
FUEL PUMP	STD	X	X	X	X	X	X	X	X	X	X
	POSITION IS FRONT										
FUEL TANK	MOUNTED ON ENGINE										
OIL GAUGE	STD TYPE (STARTER SIDE)										
	EXTENDED TYPE	X	X	X	X	X	X	X	X	X	X
OIL FILLER	Cyl#1 side (However, either side OK)	X	X	X	X	X	X	X	X	X	X
OIL DRAIN	STD TYPE	X	X	X	X	X	X	X	X	X	X
	EXTEND TYPE (KIT #92630013)										
OIL COOLER	STD	X	X	X	X	X	X	X	X	X	X
FLYWHEEL	US STD	X	X	X	X	X	X	X	X	X	X
SLOW DOWN	NON MAGNET TYPE RCV TYPE (FRONT SET) (CHANGE SIMULTANEOUS WITH CARBURETOR)										
	MILLER TYPE (REAR SET)										
CHARGE SYSTEM	STD (12V-15A) 12V-30A	X							X		
	(CHANGE SIMULTANEOUS WITH REGULATOR)		X	X	X	X	X	X		X	X
SPARK PLUG	STD (BPR6ES)	X	X	X	X	X	X	X	X	X	X
CONTROL BOX	with HOUR METER (KIT #92630002)										
	without HOUR METER										
WIRING HARNESS	STD	X	X	X	X	X	X	X	X	X	X
	EXTEND HARNESS 1000mm (NEED STD HARNESS)										
	EXTEND HARNESS 1700mm (NEED STD HARNESS)										
LABEL	RAI STD (TRADE, WARNING and EMISSION)	X	X	X	X	X	X	X	X	X	X
	CHOKE OPERATION LABEL										


• HORIZONTAL SHAFT ENGINE

OPTIONAL CRANKSHAFT CONFIGURATIONS


Metric - 35mm key - M10x1.25T2

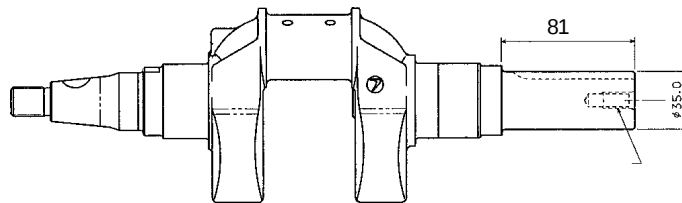


Metric Taper - 1/10 - 30mm-M10x1.5T2




SAE 1" - 1" key - 3/8-24 UNF tap




SAE 1 7/16" key - 5/8-18 UNF tap

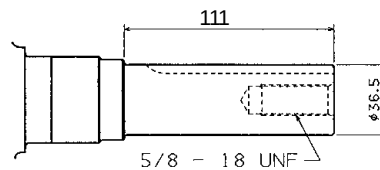


SAE 1 1/8" key - 7/16-20 UNF tap

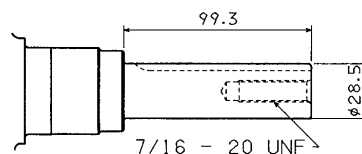


SAE Taper - 2.25/12 - 5/16-24 UNF

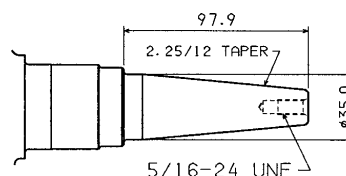

SAE Pump - 1" threaded

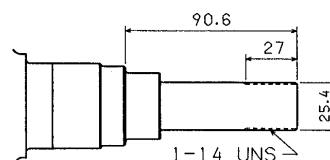


9, 11 and 13 Tooth Splines - Per Ansi B92.1-1996

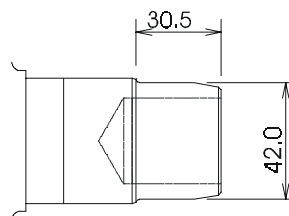

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.


• HORIZONTAL SHAFT ENGINE

OPTIONAL MAIN BEARING COVER CONFIGURATIONS


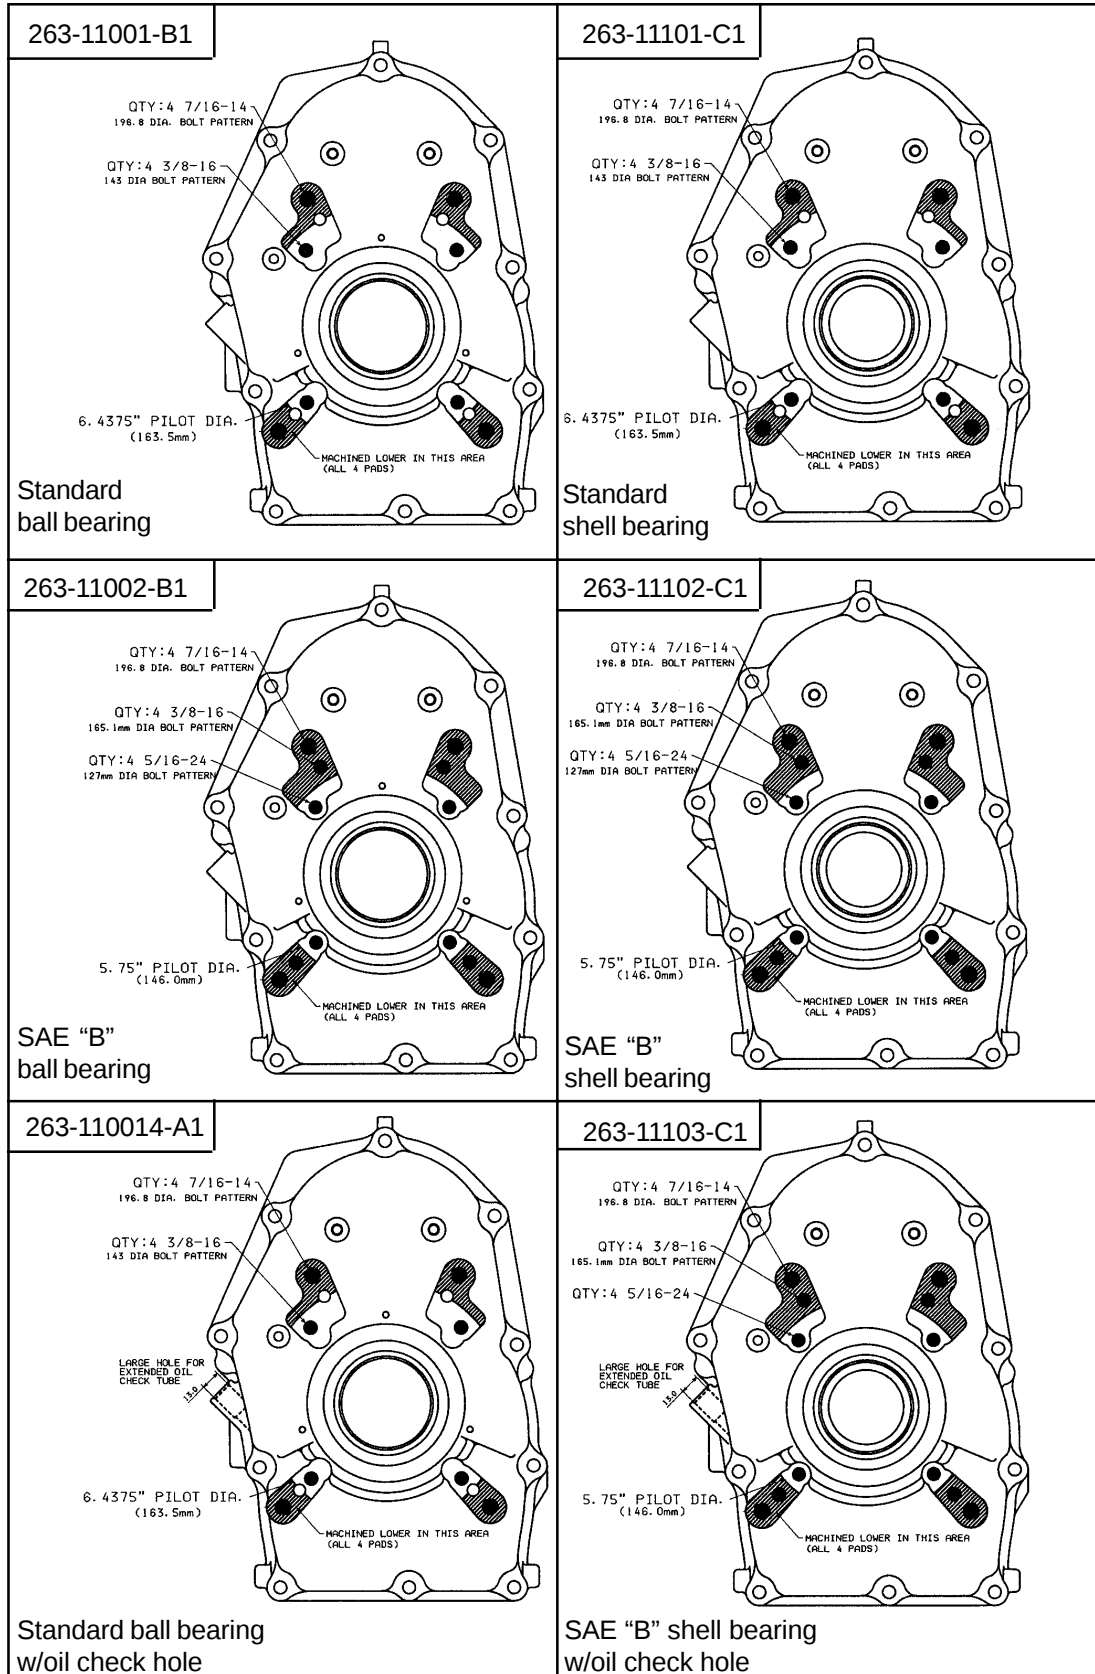


• HORIZONTAL SHAFT ENGINE

HYDRAULIC PUMP ADAPTER - FACTORY OPTION

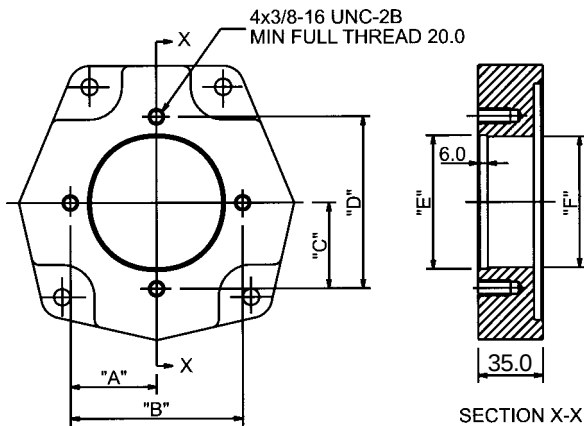


DIM (mm)	ADAPTER PLATE	
	SAE "A"	SAE "B"
A	53.19	73.15
B	106.38	146.30
C	53.19	73.15
D	106.38	146.30
E	Ø82.600	Ø101.651
F	Ø80	Ø80

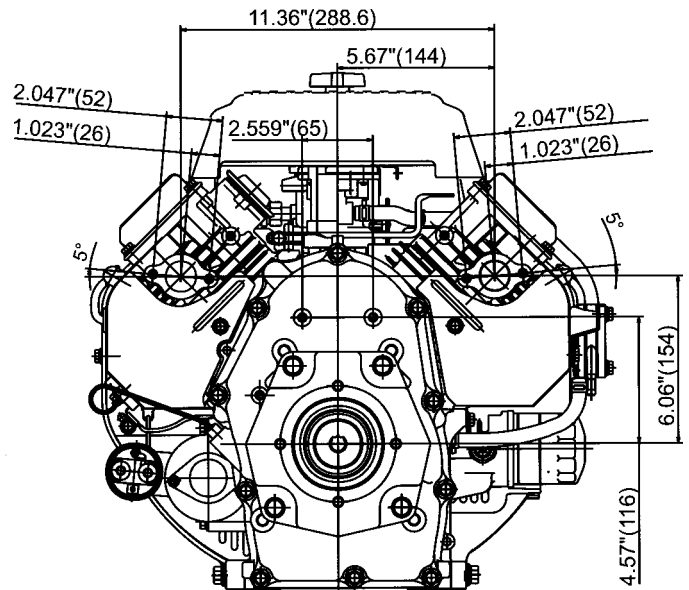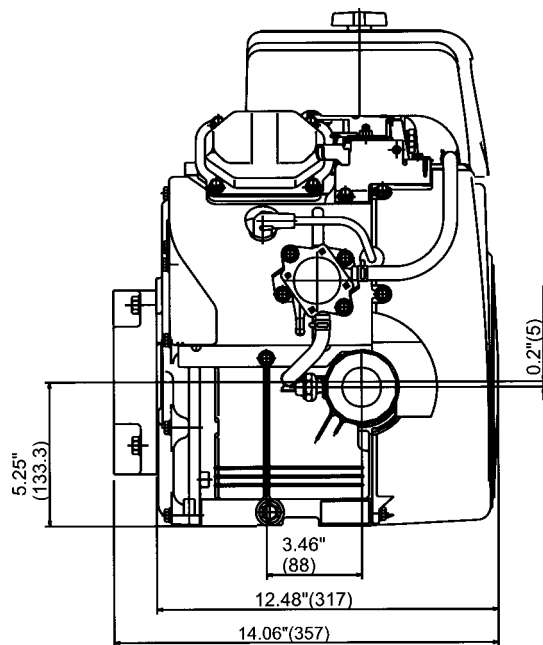

• HORIZONTAL SHAFT ENGINE


HEAVY DUTY AIR CLEANER KIT - FACTORY OPTION

Heavy Duty Air Cleaner - Option from factory

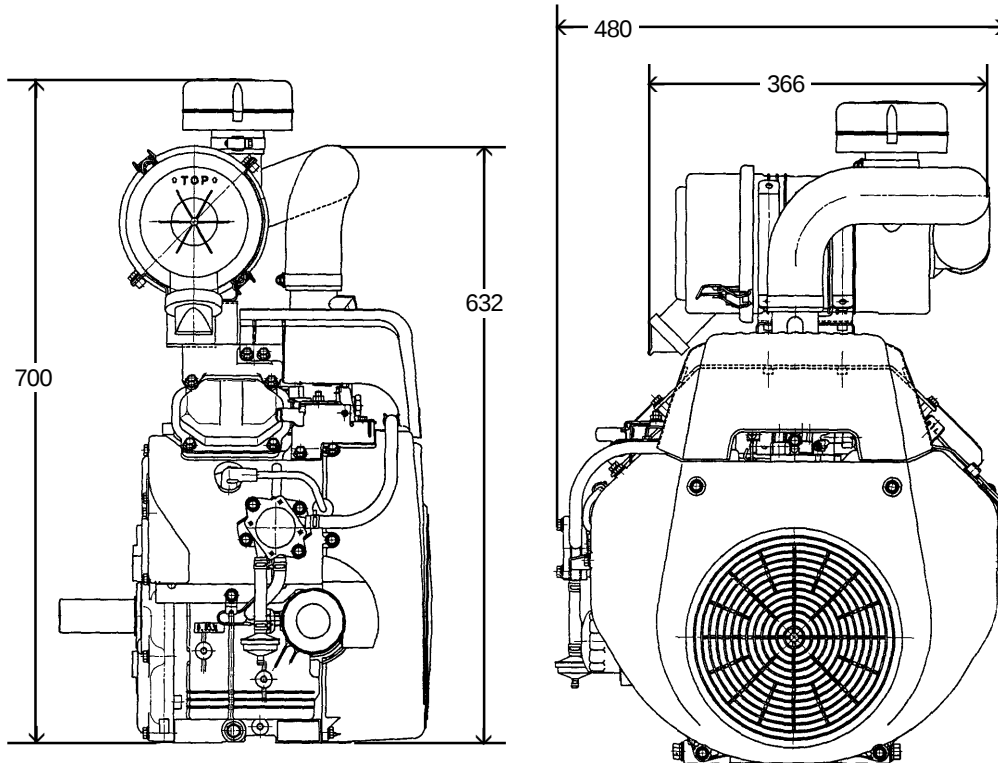

- # HORIZONTAL SHAFT ENGINE

SLOW DOWN SOLENOID - FACTORY OPTION

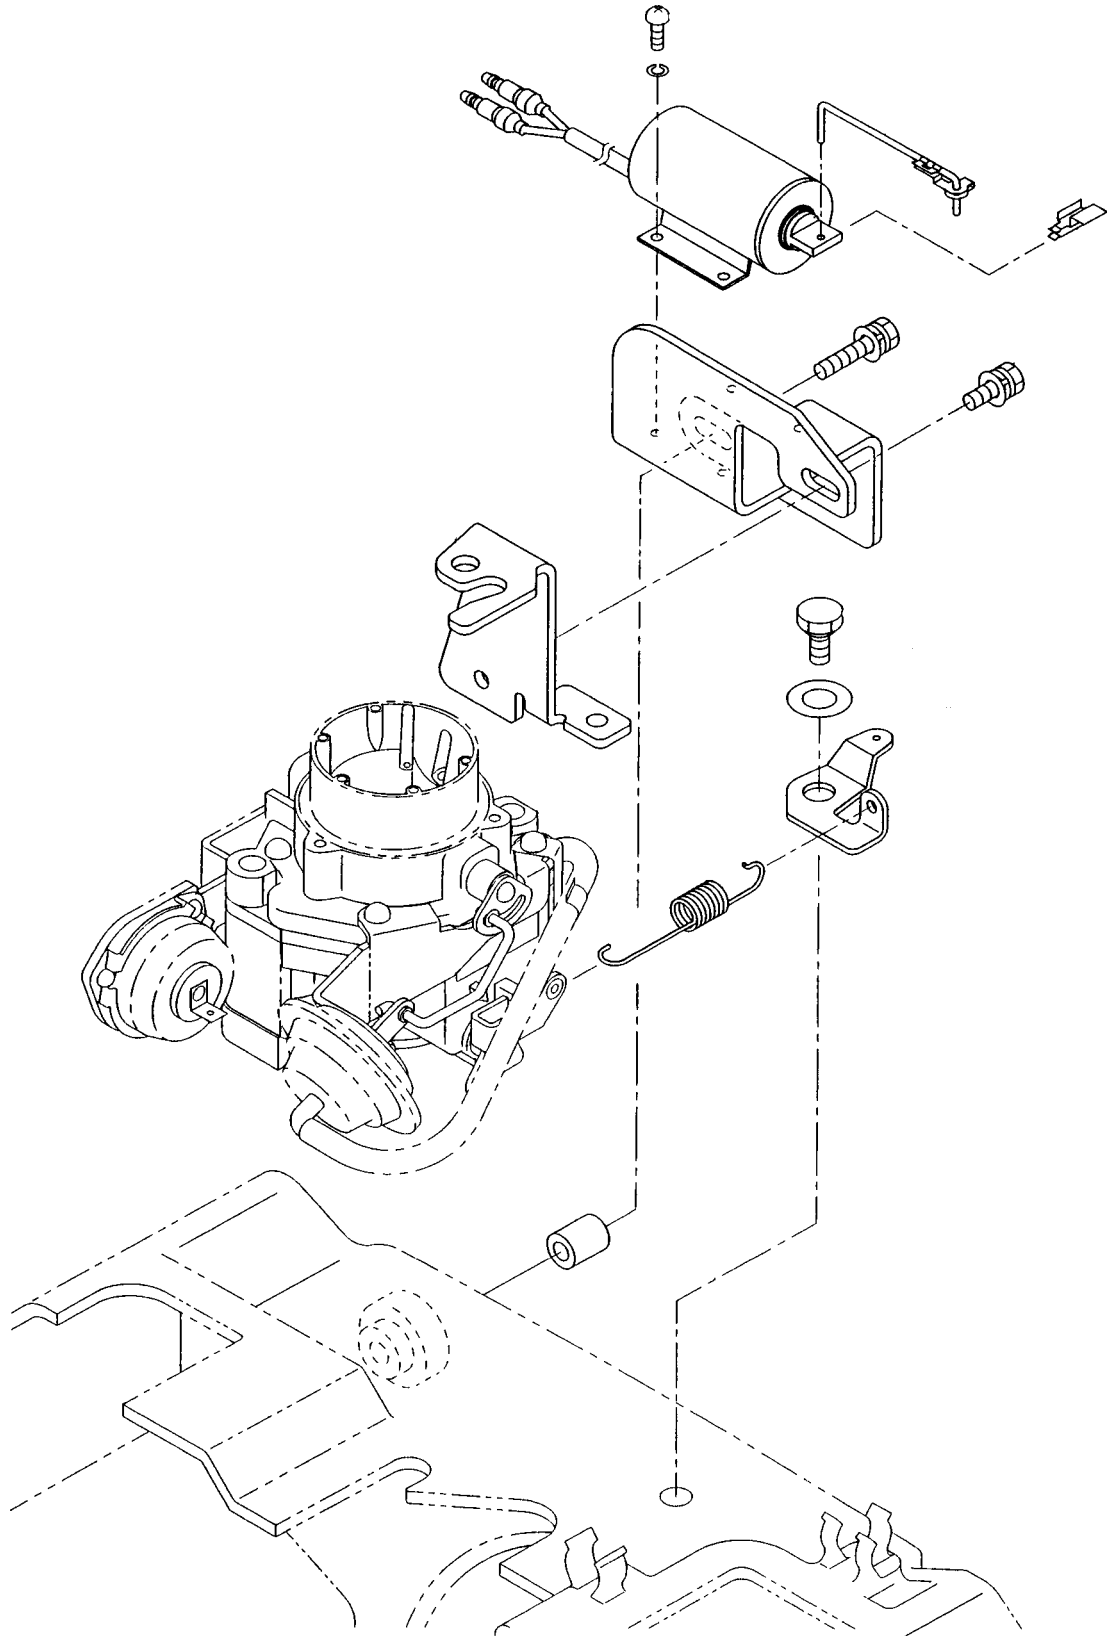


AFTER FACTORY ACCESSORIES


• HORIZONTAL SHAFT ENGINE

MUFFLER KITS

92630020 - Muffler - right side mount

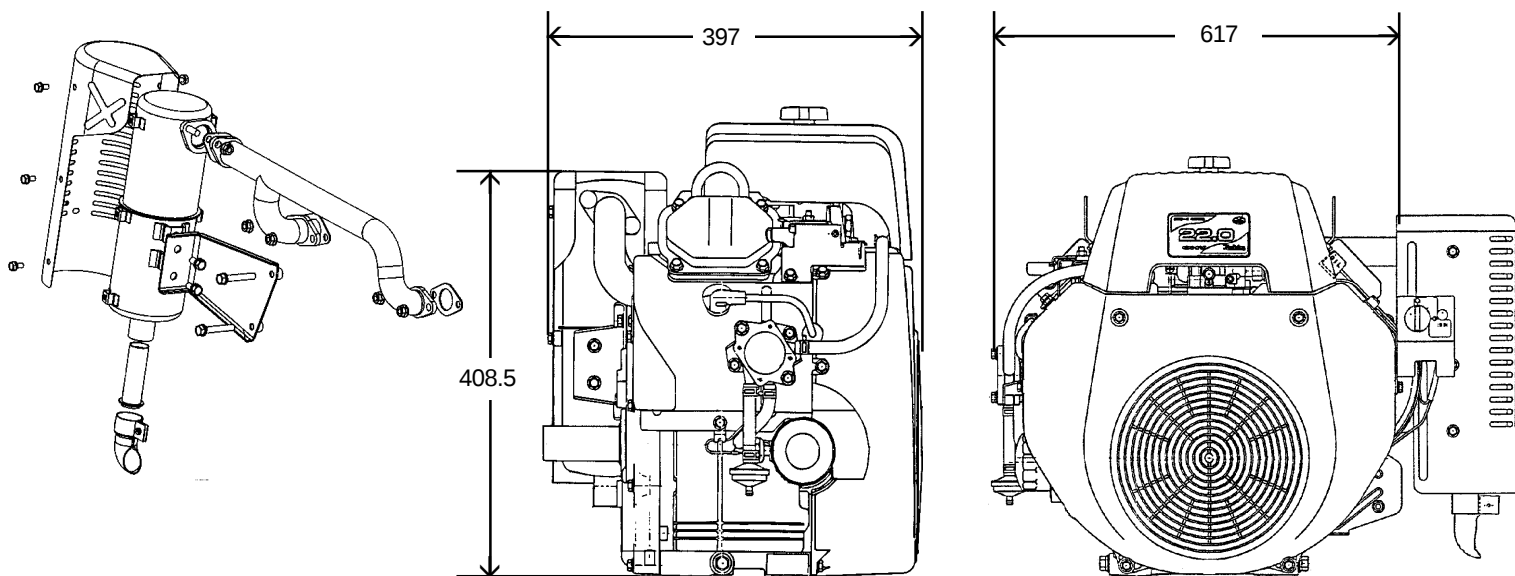




92630034 - Muffler - left side mount, oil filter side

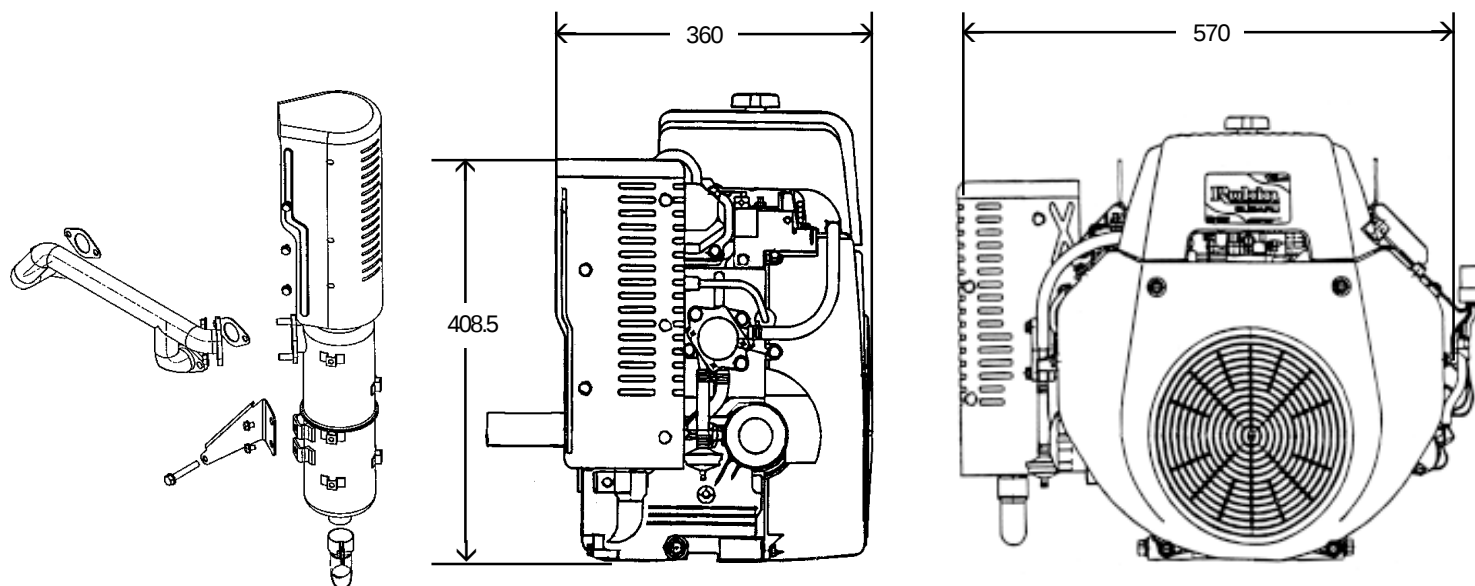




• HORIZONTAL SHAFT ENGINE

MUFFLER KITS cont.

92630005 - Muffler - rear top mount with rear discharge

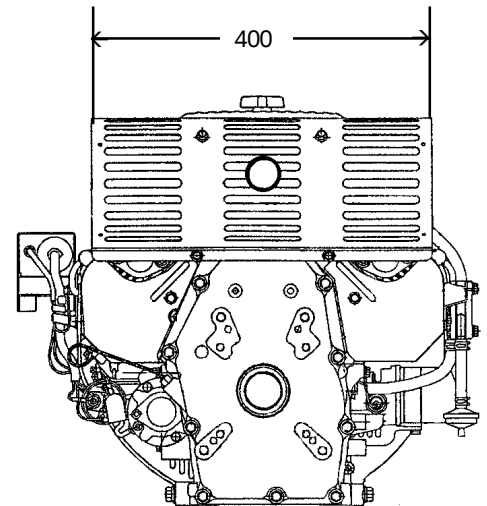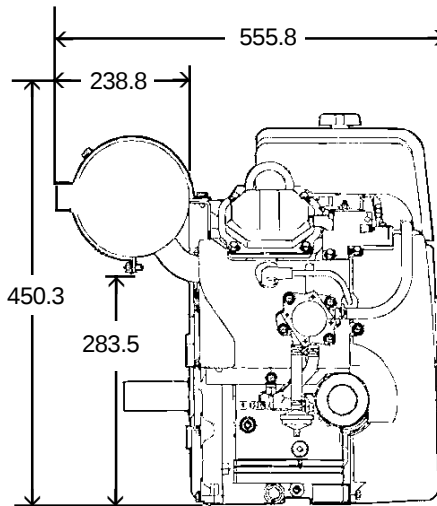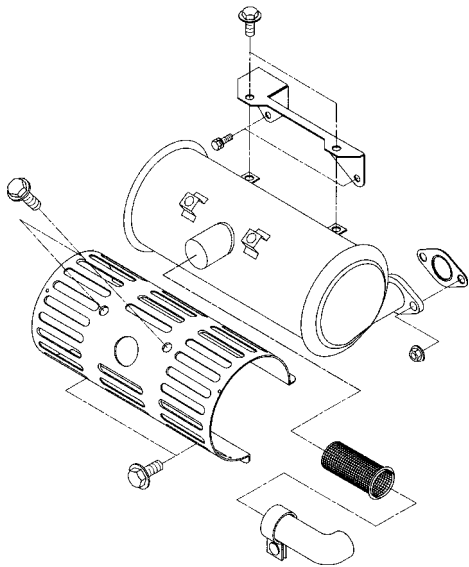


92630001 - Muffler - rear top mount with side discharge

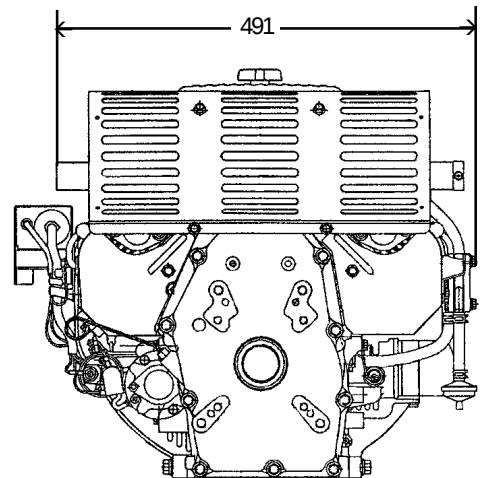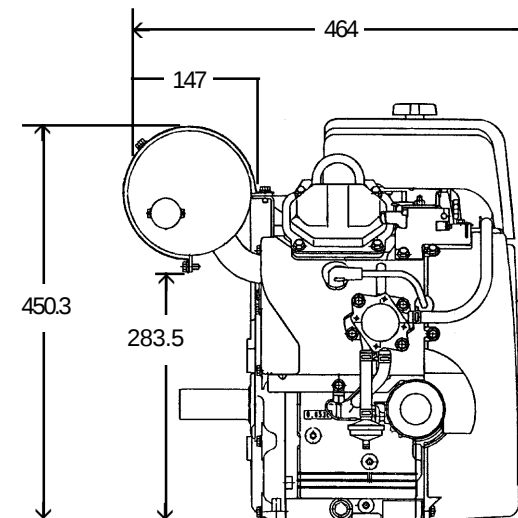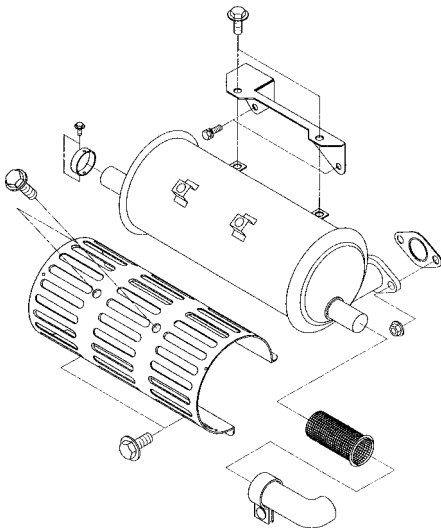

• HORIZONTAL SHAFT ENGINE

CONTROL BOX KIT

92630002 - Start-Stop switch with low oil warning lamp, hour meter and tachometer

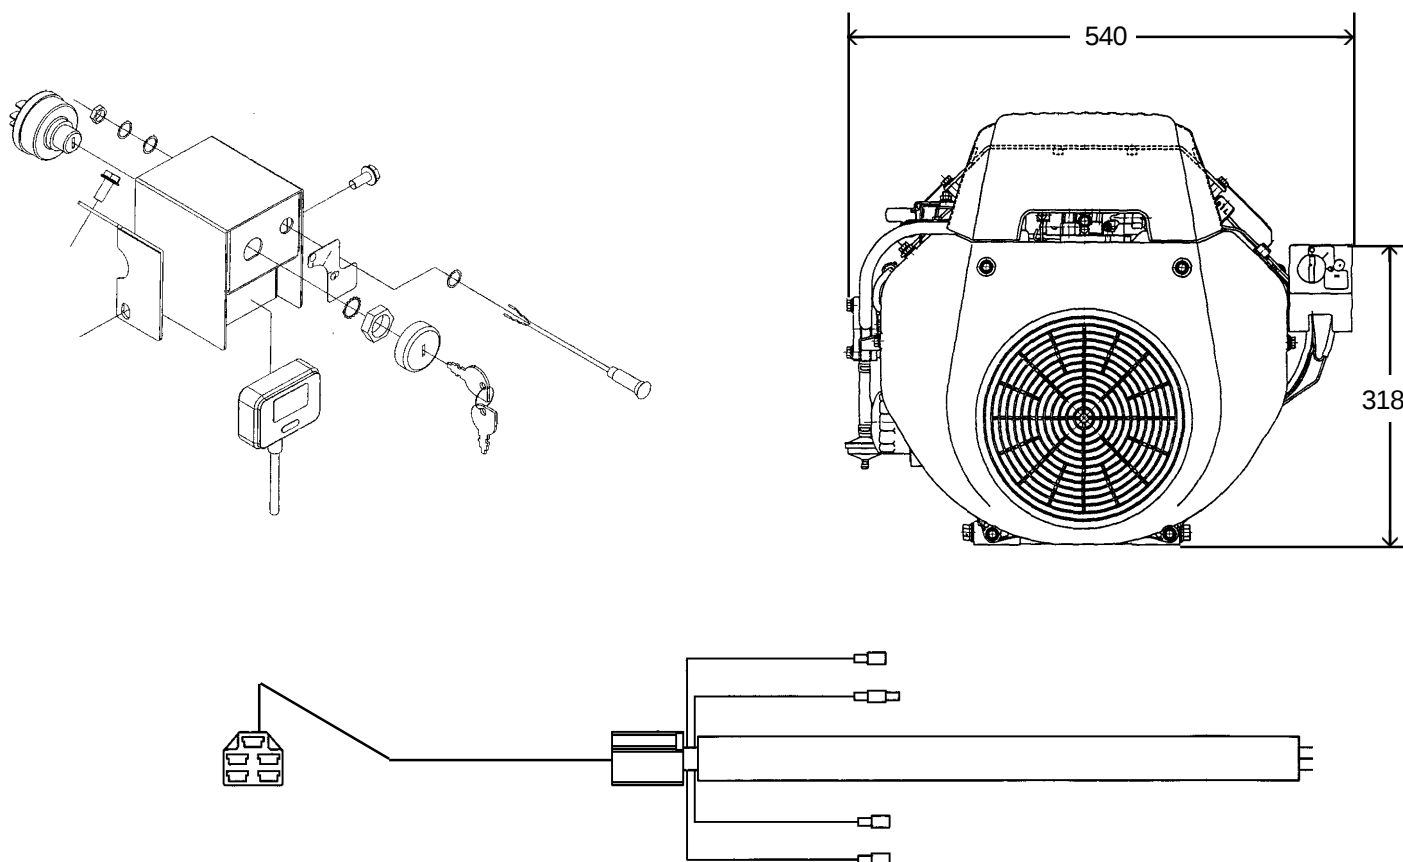

263-75202-A1 - Tach / Hour Meter

263-73121-A1 - Extended Wiring Harness (1000mm)



263-73109-A1 - Extended Wiring Harness (1700mm)

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.

• HORIZONTAL SHAFT ENGINE

OIL DRAIN KIT

92630013 - Oil Drain Kit **

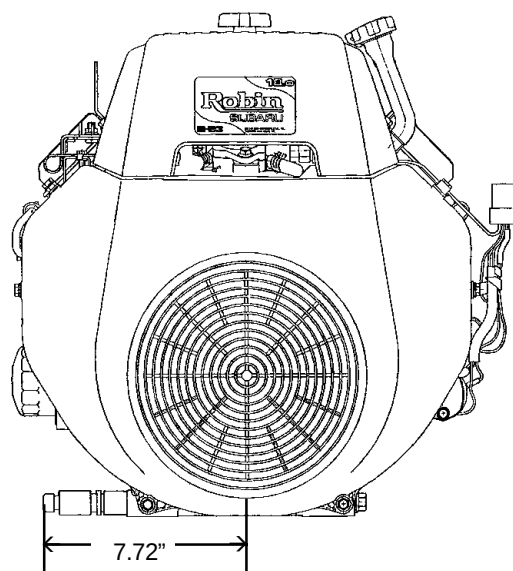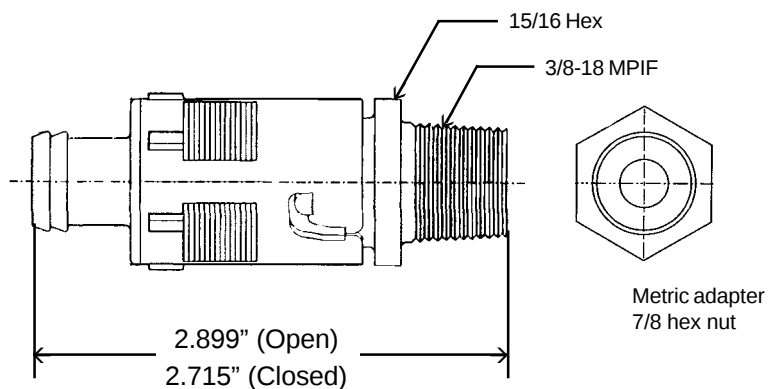



** Must use adapter supplied with kit to mount oil drain extension.

Please refer back to standard specification if dimension is not listed.

• HORIZONTAL SHAFT ENGINE

FUEL PUMP

92630021 - Fuel Pump relocation kit **

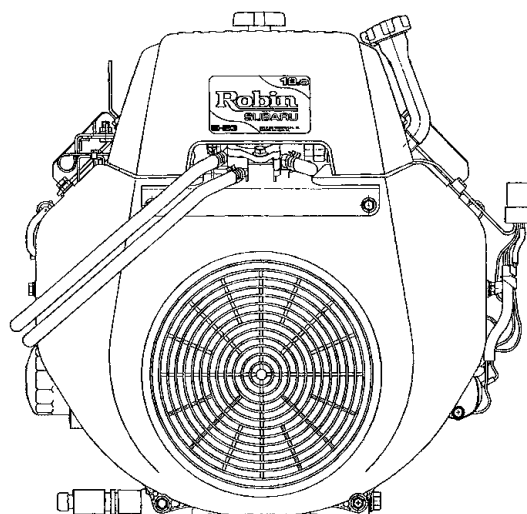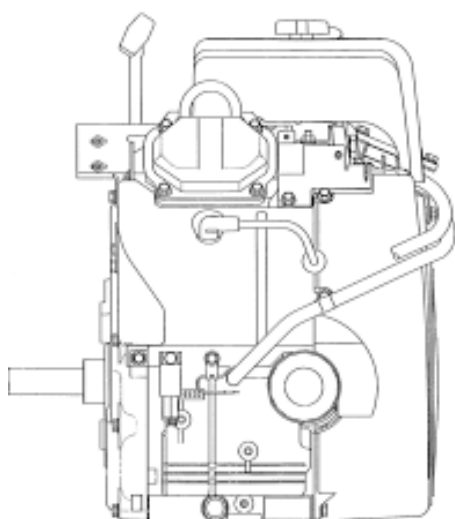


** This kit remounts the fuel pump from the side of the engine to under the air cleaner cover.

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.

• HORIZONTAL SHAFT ENGINE

CHARGING SYSTEM

263-79402-B1 - 30 amp Charging System**

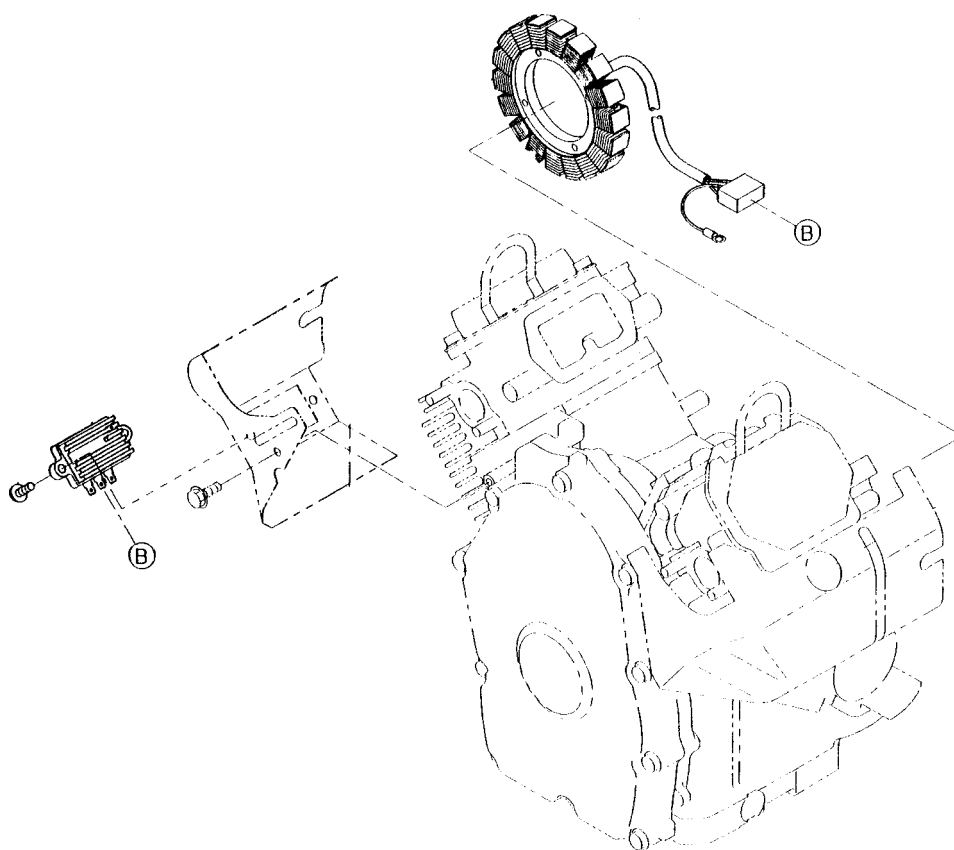

** Must use the following parts along with 30 amp charging system:


263-73110-A1	Cable, extended
263-71902-A1	Regulator, CP
001-16052-50	Bolt & Washer (x4)

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.

• HORIZONTAL SHAFT ENGINE

ROTATING SCREEN

263-55001-A1 - Rotating Screen **

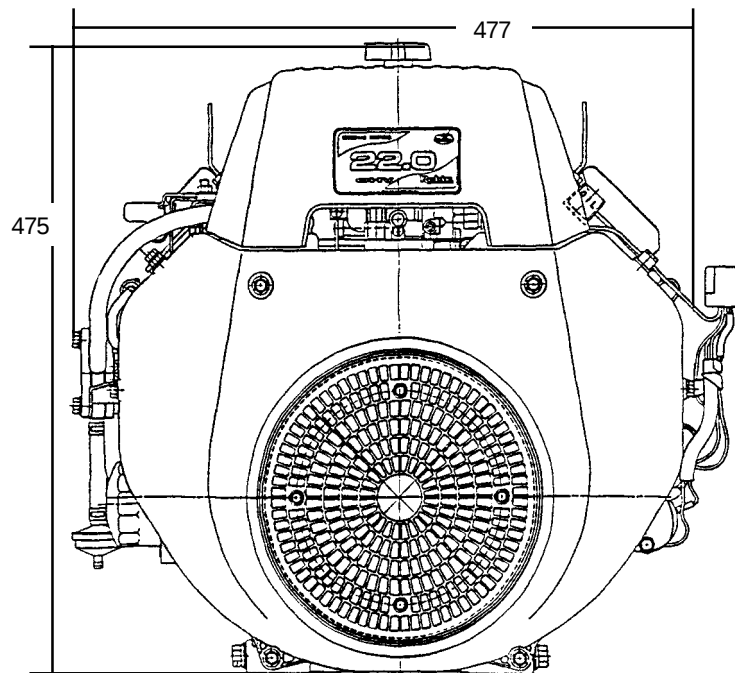

** If stub shaft kit is used, a hole must be cut in the center of screen to accomodate the shaft protruding through the screen.

Must use the following parts along with the rotating screen:


263-51102-A2	Blower Housing
004-36042-00	Screw

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.

• HORIZONTAL SHAFT ENGINE

STUB SHAFT KIT

92630003 - Stub Shaft Kit

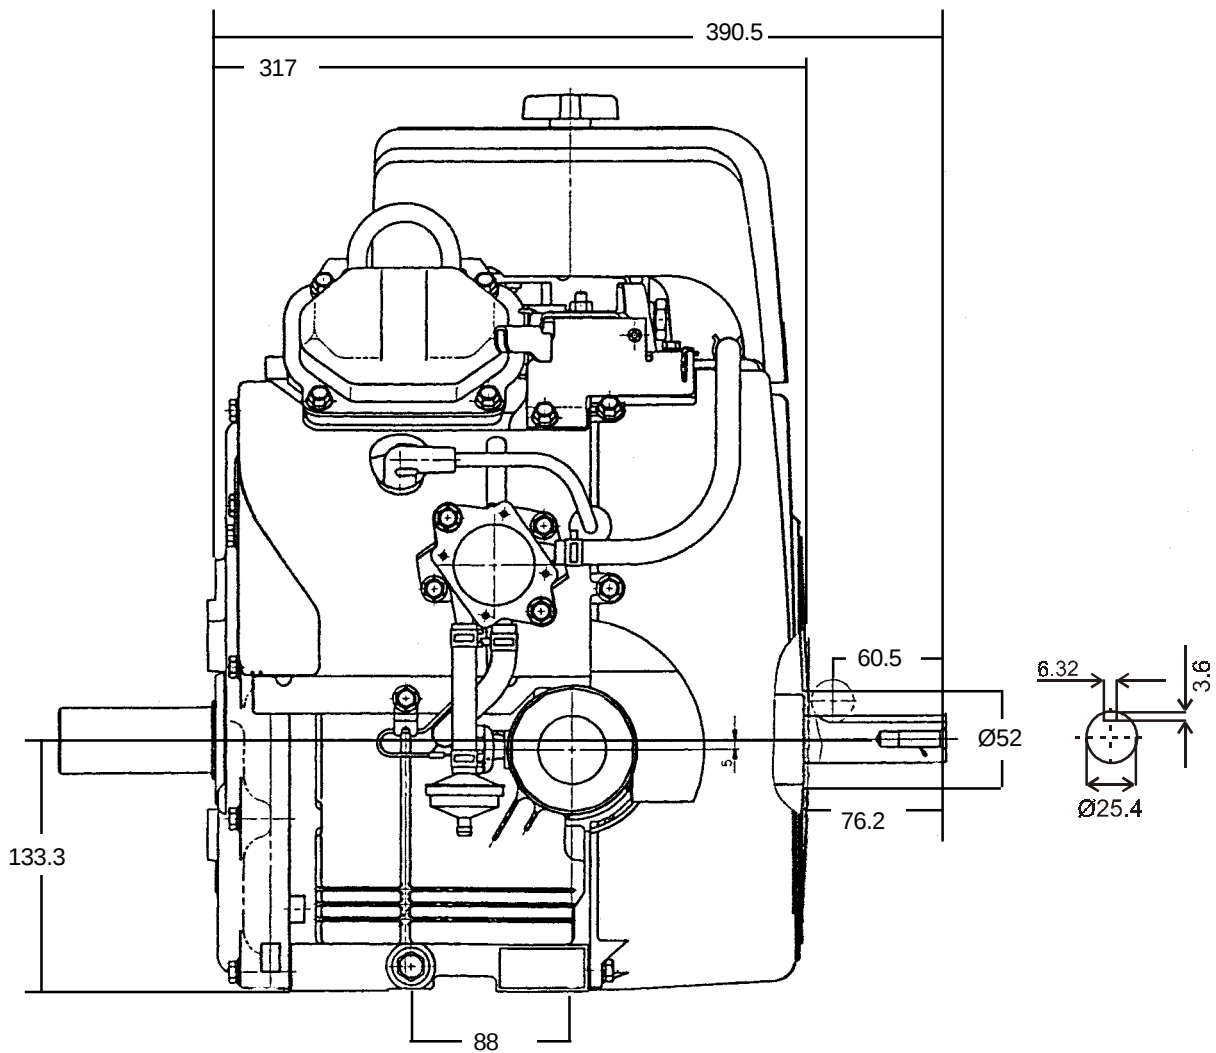

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.





• VERTICAL SHAFT ENGINE

STANDARD SPECIFICATIONS		EH63V	EH65V
Type		4-Stroke V-Twin Cylinder, Vertical PTO shaft, Gasoline Engine	
Bore x Stroke	mm (in.)	2 - 80 x 65(3.15 x 2.56)	
Piston Displacement	cm3 (cu in.)	653 (39.9)	
Compression Ratio		8.3:1	
Maximum Output	kW (HP)/rpm	18.0 HP/3600 r.p.m. (13.4 KW/3600 r.p.m.)	22.0 HP/3600 r.p.m. (16.4 KW/3600 r.p.m.)
Continuous Output	kW (HP)/rpm		
Maximum Torque	Nm (kgmf)/rpm	43.2 N•m/2000 r.p.m. (31.9 ft.•lb)	45.6 N•m/2500 r.p.m. (33.6 ft.•lb)
Direction of Rotation		Counterclockwise as viewed from PTO shaft side	
Cooling System		Forced Air Cooling	
Valve Arrangement		Overhead Valve	
Lubrication		Full pressure type with Full Flow Spin-On Oil Filter, with Oil Pressure Switch	
Lubricant		Automobile Oil SAE #20, #30 or 10W-30: Class SE or higher	
Capacity of Lubricant	L (qts.)	1670 cc (1.77 qt.)	
Carburetor		Down Draft, Float type	
Fuel		Automobile Unleaded Gasoline	
Fuel feed System		Diaphragm Pump (Pulse type)	
Ignition System		Flywheel Magneto (Solid state)	
Spark Plug		NGK BP6ES (Champion N9YC)	
Charging Capacity		12V - 15A / 12V -30A	
Starting System		Electric Starter	
Governor System		Centrifugal Flywheel Type	
Air Cleaner		Dual Element Type	
Weight	kg (lb.)	42 kg (92.6ls.)	
Dimensions (L X W X H) mm (in.)		475mm x 469mm x 353mm (18.70" x 18.46" x 13.90")	

Specifications subject to change without notice.

- VERTICAL SHAFT ENGINE


STANDARD DIMENSIONS - EH63V, EH65V

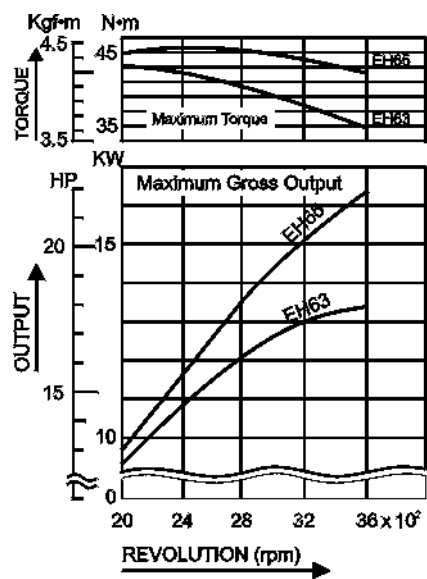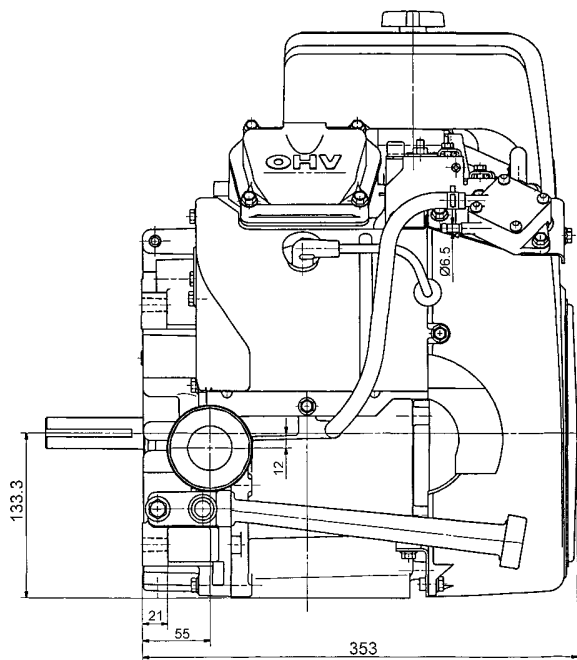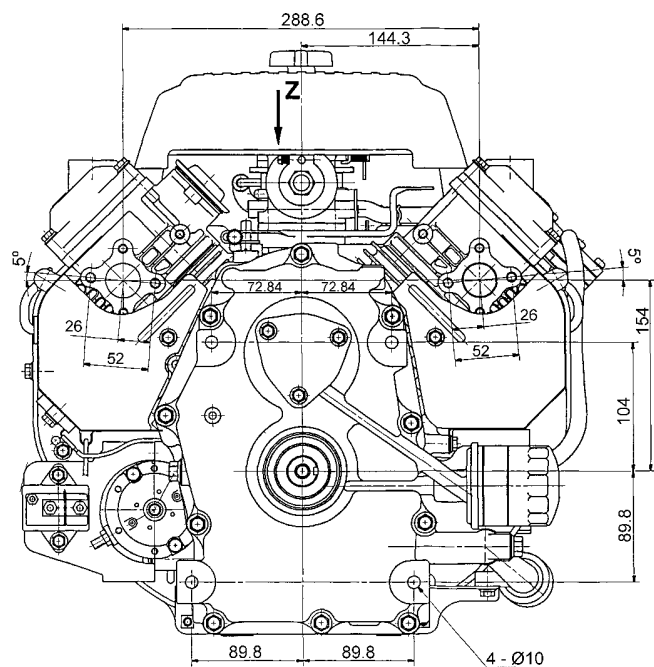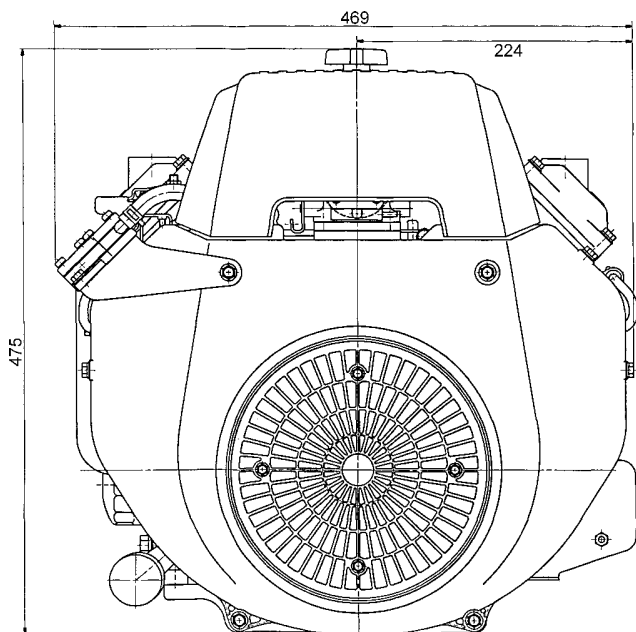

• VERTICAL SHAFT ENGINE

MUFFLER KIT

92630014 - Muffler

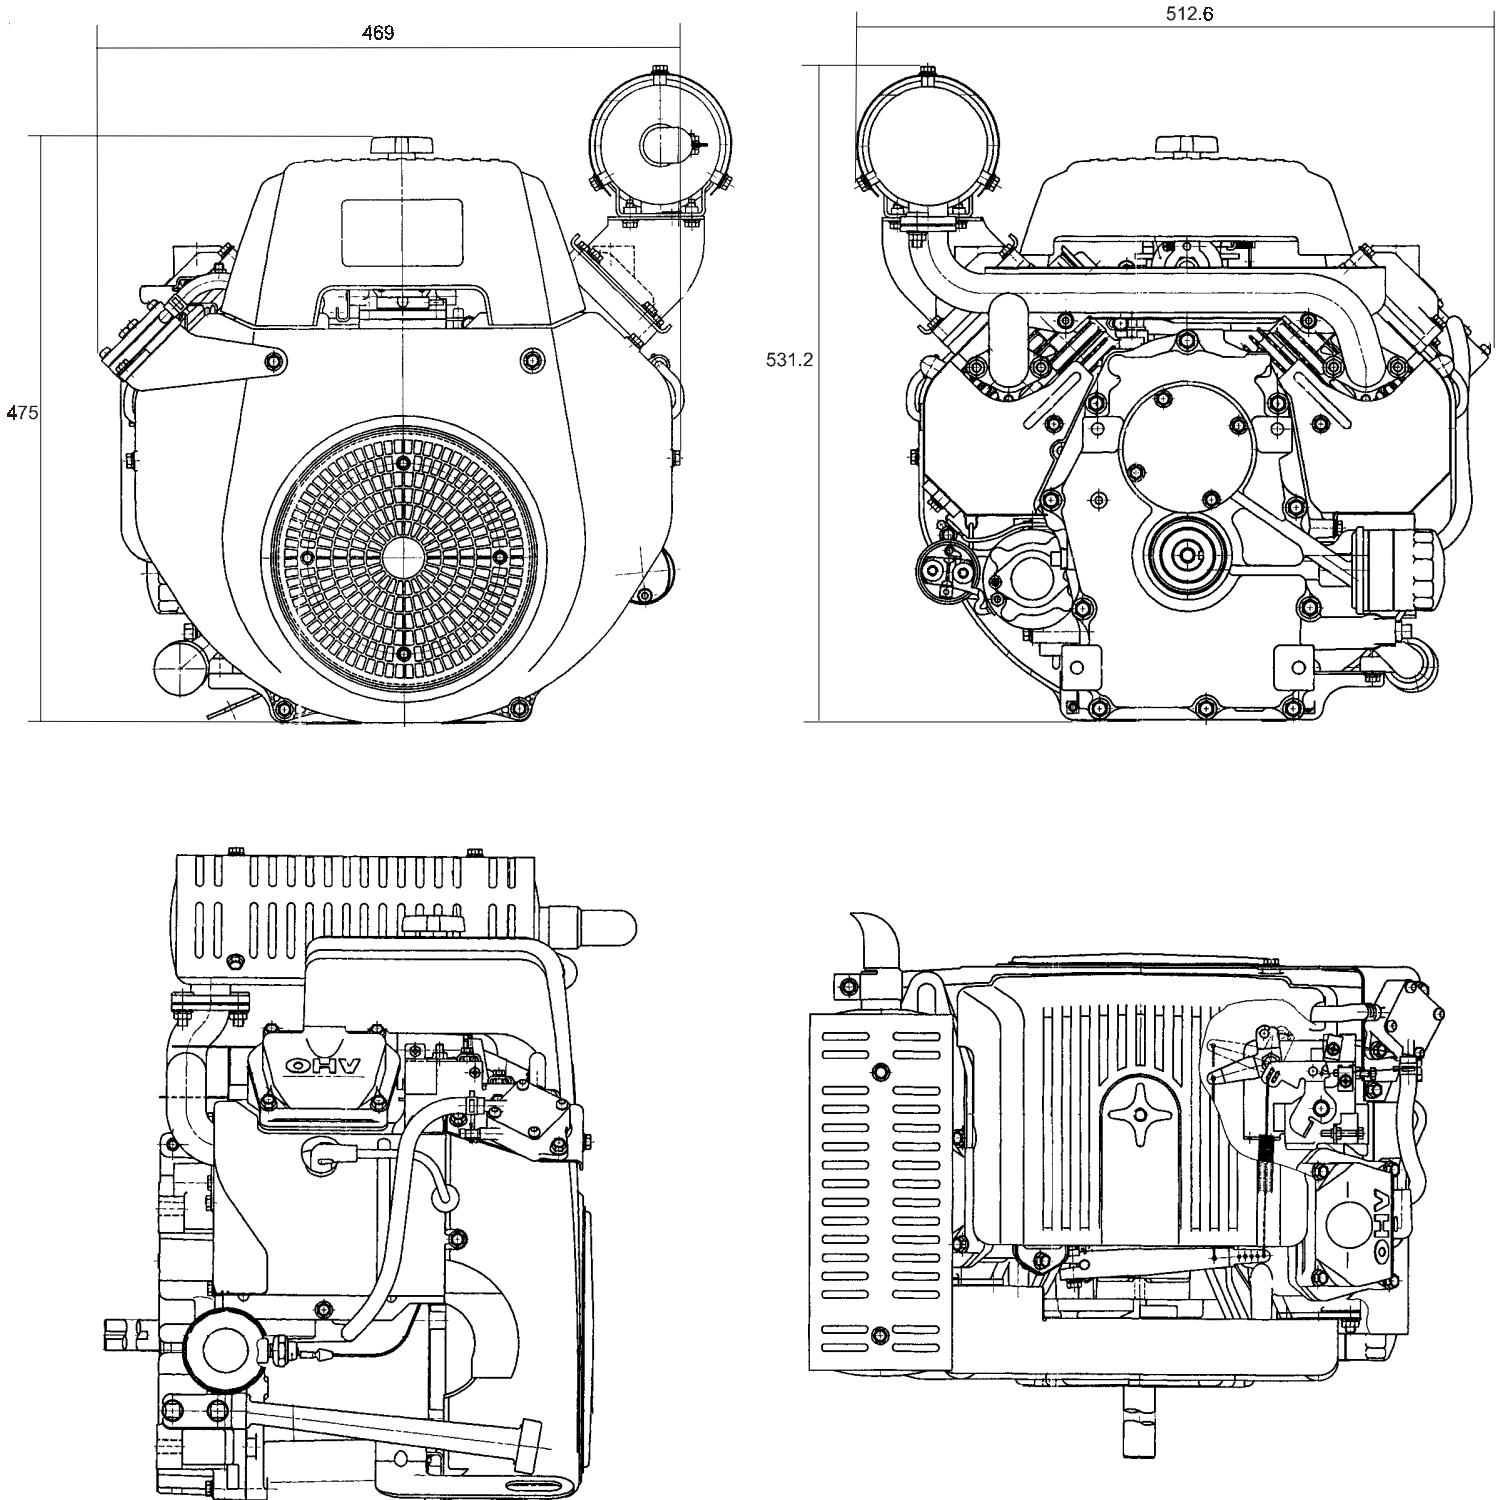

Please refer back to standard specification if dimension is not listed. Measurements shown in mm.

Counter Catalogs, Microfiche, Price Lists

All printed material including individual manuals are available from the Robin Fulfillment Center.



Description	Item No.	Price
Parts Manual Counter Catalog 38 part manuals in a large binder. The manuals included in this catalog are listed on page 4 and 5.	PUB-MC201	\$95.00
Service Man. Counter Catalog 26 service manuals in a large binder. The manuals included in this catalog are listed on page 6.	PUB-MC101	\$65.00
OEM Parts Man. Counter Cat. OEM manuals in a large binder. The manuals included in this catalog are listed on page 5.	1193M300	\$55.00
Equipment Counter Catalog Part & Service manuals in a large binder. The manuals included are listed on page 7.	PUB-MC401	\$125.00
Microfiche, Engine Part Manual 38 manuals covering current and past models	PUB-MF2001	\$16.00
Microfiche, Equipment Manuals 39 parts & service manuals for current & past models	PUB-MF4001	\$16.00
Microfiche, Engine Specification 28 cards covering Robin Subaru & Wisconsin Robin specs	PUB-MF1001	\$12.00
CD-ROM, Engine Manuals 220+ parts & service manuals for Robin Subaru & Wisc. Robin	PUB-CD2001	\$24.00
CD-ROM, Equipment Manuals 150+ parts & service manuals for Robin Generators & Pumps	PUB-CD4001	\$24.00
Wall Chart Engine repair specification chart	PUB-WALCHRT	\$3.00
Dimension Table Catalog Dimensions of major components for DY/EC/EH model engines	PUB-DIM-EH	\$45.00
Dimension Table Catalog Dimensions of major components for EY model engines	PUB-DIM-EY	\$45.00
Specification Sheets EC series engine Specification Sheets	PUB-SS-EC	\$6.75
Specification Sheets EH12, EH12-2, EH17, EH17-2 Specification Sheets	PUB-SS-EH-1	\$6.75
Specification Sheets EH25, EH25-2 Specification Sheets	PUB-SS-EH-2	\$6.75
Specification Sheets EH36, EH41, EH65 series, EH65V series Specification Sheets	PUB-SS-EH-3	\$6.75
Specification Sheets EH34 Specification Sheets	PUB-SS-EH-4	\$6.75
Specification Sheets EH18V Specification Sheets	PUB-SS-EH-5	\$6.75
Specification Sheets EH30 Specification Sheets	PUB-SS-EH-6	\$6.75
Specification Sheets EY series engine Specification Sheets	PUB-SS-EY	\$6.75
Robin Subaru Ad Planner Line art and print ads for engines and generators	PUB-ADP399	\$10.00
Promotional Catalog Robin promotional merchandise catalog for signs, shirts, hats, etc.	PUB-PROMOCAT	no charge
Spec Crossover Guide Guide manual to crossing old spec to new	PUB-SPECX	\$6.75
Wisc. Robin Spec Software W.R. specification list software (requires Windows)	WRSPECS	\$10.00
Warranty Procedure Manual Warranty policy guide (must be a registered warranty center)	PUB-WPME01	\$1.00
Warranty Form Software Warranty form & procedure manual software (requires Windows)	WARDISK	\$6.00
Parts Price Book Part price list book, all active parts listed (4/1/01)	PUB-PPL698	\$4.50
Dealer Engine Price List Engine list prices, with detailed descriptions	PUB-DP2001	\$1.00
Generator & Pump Parts Price Book Price list book for equipment parts pricing (7/1/99)	PUB-EQTPL99	\$3.50
Parts Price Disk Complete part price list (4/1/01)	PDISK98	\$10.00

Robin Fulfillment Center

SUBARU PO Box 1908, Wausau, WI 54402-1908, USA

web site: www.robinamerica.com • email: info@robinamerica.com

Tel.: 888-576-2465 or 715-849-4214
Fax: 715-849-2317 (Outside USA)

Robin Fulfillment Center Order Form



Call 1-888-576-2465 or Fax 1-715-849-2317

Outside the USA phone: 715-849-4214 • www.robinamerica.com

Mail Orders To: Robin Fulfillment Center • P.O. Box 1908 • Wausau, WI 54402-1908



1 Ordered By:

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: () Fax: ()

2 Ship To: If different from ordering address

Name: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: () Fax: ()

Shipping Method: (only mail delivery available to PO Boxes)

☐ Mail ☐ UPS ☐ FedEx ☐ DHL

3 Items Ordered:

	Item No.	Description	Qty.	Price	Total
1					
2					
3					
4					
5					
6					
7					
8					
9					

4 Payment Method:

☐ Check ☐ VISA ☐ MasterCard

☐ Open Account (Robin distributors or preapproved accounts only)

P.O. # _____

Credit Card Number: _____

Card Expiration Date: _____

Name as shown on card: _____

Card Holder Signature: _____

Credit Card billing address, if different from above:

Address: _____

City: _____ State: _____ Zip: _____

Subtotal

Order Handling

\$ 2.00

Add Sales Tax (WI & IL shipments Only)

Shipping (call for quote)

Order Total

Terms of Sale

- All prices are in US dollars
- All in stock items shipped within 24 hours
- In-stock items shipped immediately, back ordered items shipped when available.

